

Industry's First Single-Chip 12 V WPC-Compliant Transmitter for A6-type Coils

FEATURES

- Conforms with WPC Specification version 1.1
- Manages all three coils in the A6 configuration without user supervision
- Operates from 12 V ($\pm 5\%$) supplies
- Multi-mode (multi-protocol) capability with dynamic switching
- Half-Bridge DC-AC inverter integrated onboard
- Demodulates and decodes communication packets from WPC-compliant receivers
- Implements closed-loop power transfer control
- Optional 2-way communication security and encryption to 64-bit
- Master/Slave I²C interface
- Compact 6mm x 6mm 48-lead TQFN package

SAFETY FEATURES


- Over-current and over-temperature protection
- Programmable Foreign Object Detection (FOD)
- Power good and fault condition detection with LED indicator outputs

TARGET WIRELESS POWER APPS

- Charging mats or pads
- Public Facilities – Shops, Libraries, Airports, Schools
- Office Furniture
- Personal Computer Docks
- Portable Instruments
- Medical Devices

VALUE ADDED BEYOND WPC "Qi"


- Delivers industry-leading power to receiver (5W to WPC-compliant receivers, more when using IDTP9020 Receiver)
- Optional, proprietary Back-Channel communication provides additional levels of encryption and security
- Manages power transfer fault conditions automatically and controls status indicator LEDs

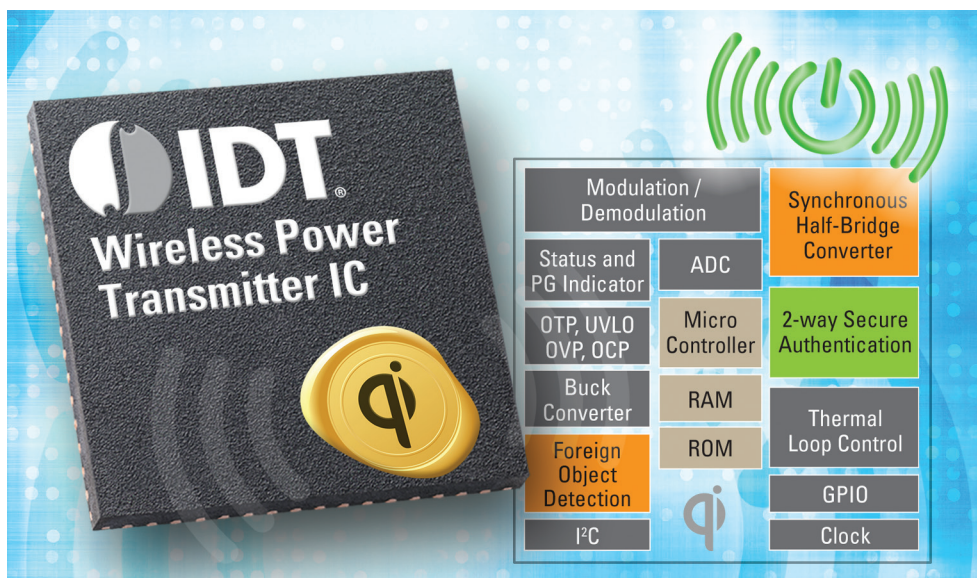

The IDTP9036 is a highly-integrated single-chip WPC1.1-compliant wireless power transmitter IC for power transmitter design A6. The device operates with a 12V ($\pm 5\%$) adaptor, and supplies an integrated half-bridge inverter for DC/AC conversion. It controls the transferred power by modulating the switching frequency of the half-bridge inverter from 115kHz to 205kHz at a fixed 50% duty cycle as specified by the WPC specification for an "A6" 3-coil transmitter. It contains logic circuits required to demodulate and decode WPC-compliant message packets sent by the mobile device to adjust the transferred power.

The IDTP9036 manages all 3 coils in the WPC TX-A6 configuration, performing detection and charging control without user supervision. It also features a proprietary back-channel communication mode compatible with other IDT Wireless Power products which provides additional secure authentication capabilities, in addition to implementing the WPC-specified device identification communication sequence and closed-loop control protocol, which constantly adjusts transmitted power.

EVALUATION BOARD

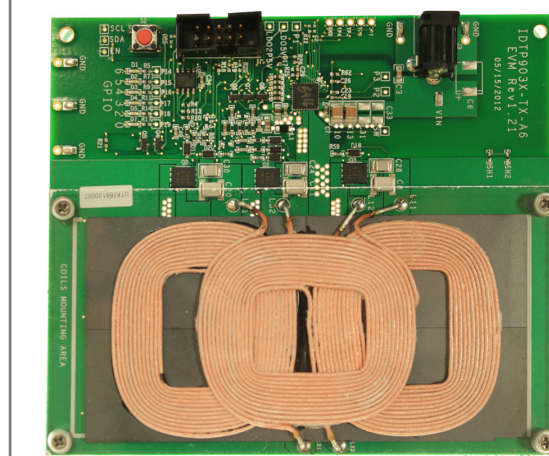

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its subsidiaries reserve the right to modify the products and/or specifications described herein at any time and at IDT's sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties. IDT's products are not intended for use in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are registered trademarks of IDT. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of IDT or their respective third party owners. © Copyright 2012. All rights reserved.

PB_IDTP9036_REVA1212



WIRELESS POWER

BY  IDT.

WWW.WIRELESSPOWERBYIDT.COM

