


NOTES:


1. SUGGESTED MTG. HOLE ϕ .180
2. HARDWARE IS INCLUDED
3. THIS IS A LEAD FREE PRODUCT.
4. MAX. REFLOW IS 245°C FOR 5 SEC.

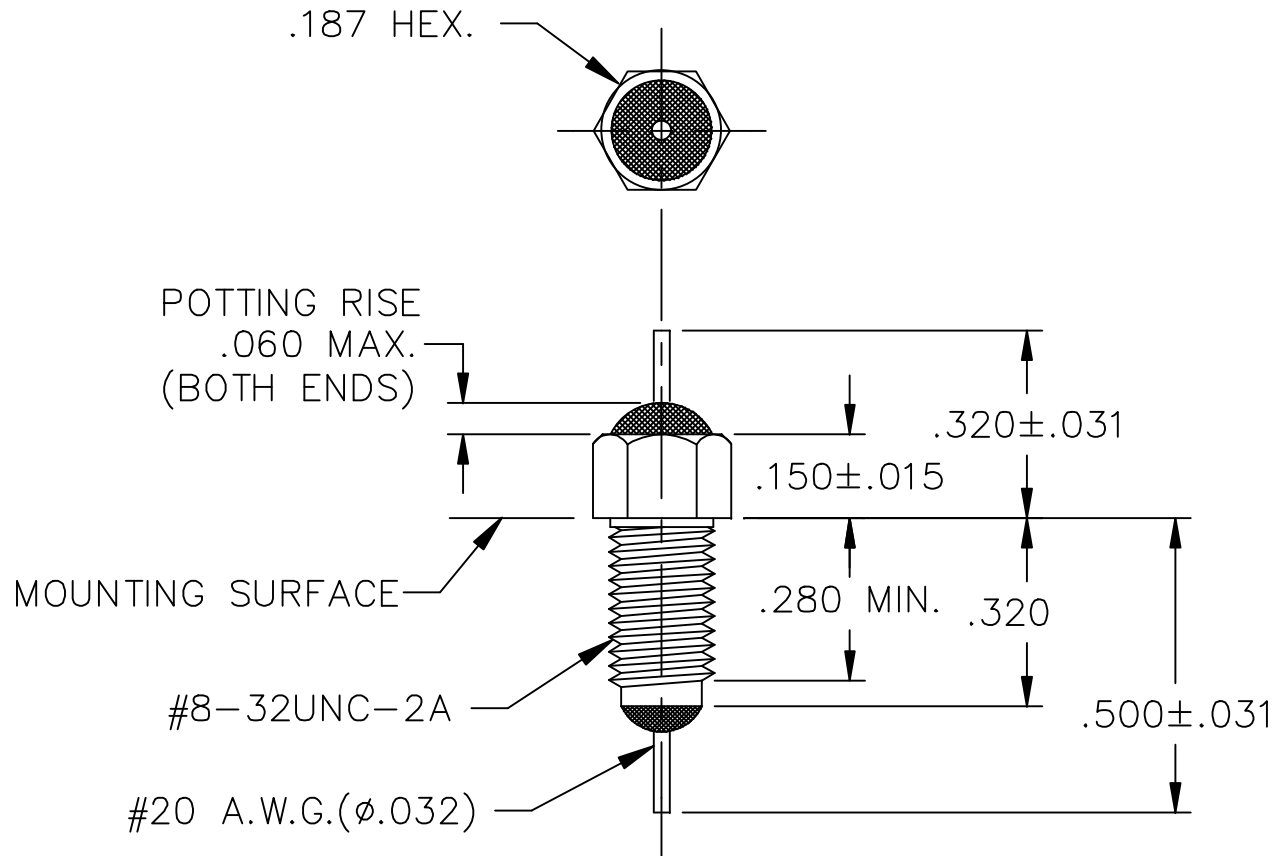

BUSHING FINISH:	SILVER
LEAD FINISH:	TIN/SILVER
CAPACITANCE	60 nF MIN
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C 100 VDC 125°C 70 VDC
DC RESISTANCE	.01ohms MAX.

IL=PER MIL-STD-220, @25°C N/L

MIN. NO LOAD	
FREQ. MHz	I.L. (db)
1	10
3	14
10	38
30	65
100	75
300	75
1 GHz	75



MARKING:
 PART: SF001 (FAIRVIEW)
 SF001(M) (MEXICO)
 BAG: SCI-1293F-001
 DATE CODE
 QTY/BAG (200 MAX.)

					02	01	00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
					CN 30514-CPD	CN 28342-CPD		CHANGE NOTICE	Fractions ± 1/64
						REDRAWN			Dec. .xx±
									Dec. .xxx±.010
									Angles ±0° 30'
									CODE IDENT. NO. 0LSP2

FAIRVIEW PENNSYLVANIA
 SPECTRUM CONTROL INC.
 Dwn. KAUFFMAN
 Date 09-19-06
 Engr. STRUCHEN
 Scale NONE
 Description
 Pi, RESIN SEAL FILTER
 1293F-001