


NOTE: HARDWARE IS INCLUDED.
SUGGESTED MTG. HOLE .228 DIA.




LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	5500 pF GMV.
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C 200 VDC MAX. 125°C 100 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	---
10	20
100	68
1 GHz	70
10 GHz	70

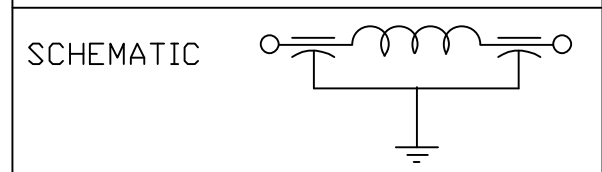

MARKING:
PART: SCI 1201-066
BAG: 1201-066
XXX DATE CODE
XXX QTY./BAG
(100/ BAG MAX.)

	6	5	4	3	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
	CN #10201	CN 200667	CN 189629	CN 185003	CHANGE NOTICE	Fractions ± 1/64
				REDRAWN		Dec. .xx±
						Dec. .xxx± .010
						Angles ±0° 30'
						CODE IDENT. NO. DLSP2

api  **FAIRVIEW PENNSYLVANIA**
technologies corp.

Dwn. SLAGLE	Description
Ckd. 12-30-14	FILTER, SING, Pi, BSHG
Apvd. B.DEVINE	1201-066
Scale NONE	