


Capacitor, Tantalum, 27 uF, +/-10% Tol, 20 V

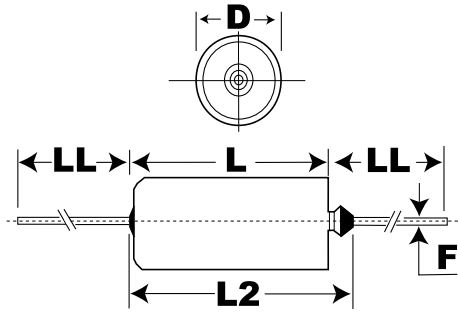

Dimensions (mm)		
Symbol	Dimension	Tolerance
D	4.7	+/-0.25
L	12.04	+/-0.79
L2	15.49	
F	0.51	+/-0.05
LL	38.1	+/-6.35

Notes:

-When Supplied On T&R Or Ammo, Lead Length Is Determined By Taping Specification

General Information	
Supplier:	KEMET
Application:	General Purpose
Sub Application:	ExtendedRange
Body Type:	Axial Hermetic
Lead Type:	Un-insulated Wire
Termination Type:	Tin-Lead (SnPb)
RoHS:	No

Specifications	
Capacitance:	27 uF
Tolerance:	+/-10%
Voltage:	20 VDC (85C)
Voltage:	16 VDC (125C Surge)
Voltage:	0.2 V (125C Reverse)
Temperature Range:	-55/+125C
Resistance/ESR:	1.8 Ohms (100kHz)
Leakage Current:	4 uA
Dissipation Factor:	6%

Packaging Specifications	
Package Kind:	Bulk
Package Type:	Bag
Package Quantity:	75